


4TNV84T-BGGES

4TNV84T-BGGES-PPG

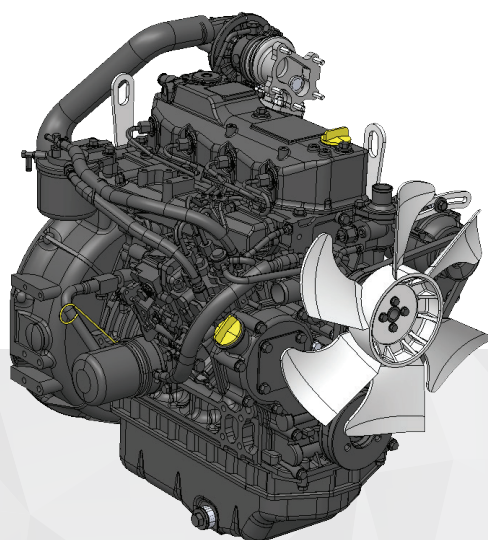

4TNV84T-BGGES

LENGTH w/fan 29.5 (748)
in (mm)

WIDTH in (mm) 20.5 (520)

HEIGHT in (mm) 28.0 (710)

WEIGHT (DRY) 397 (180)
lbs (kg)

**TYPICAL GENERATOR
OUTPUT kWe (Standby)**

24.6

**TYPICAL GENERATOR
OUTPUT KWE (PRIME)**

22.4

**CONTINUOUS GROSS
ENGINE POWER hp (kW)**

33.6 (25.1)

**FUEL CONSUMPTION
gal/h (l/h)**

2.12 (8.01)

REGULATION

EPA Emergency
Stationary

CYLINDERS

4

BORE X STROKE (mm)

84 x 90

DISPLACEMENT L (ci)

1.99 (121)

RATED SPEED rpm

1800

COMBUSTION TYPE

Direct Injection

ASPIRATION

Turbo Charged

GOVERNOR TYPE

Mechanical

LUBRICATION SYSTEM

7.4L Capacity Oil Pan

ELECTRICAL SYSTEM

12V-40A

FUEL SYSTEM


YPD-MP2
(Mechanical)

COOLING SYSTEM

Water Pump
Belt Driven

POWER TAKE OFF

FWH:SAE 4
FW: SAE 7.5

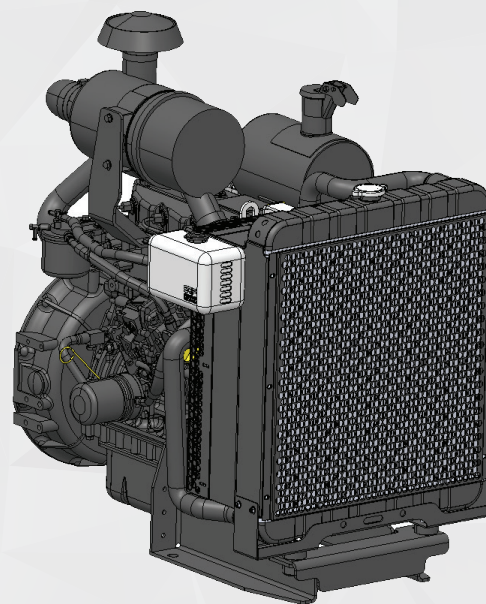

4TNV84T-BGGES-PPG

LENGTH w/fan 36 (910.2)
in (mm)

WIDTH in (mm) 26.7 (677)

HEIGHT in (mm) 38.4 (975.3)



PURE. RELIABLE. POWER.

YANMAR is engaged in the relentless pursuit of high efficiency, low emission, diesel engines. With technology that already meets the next generation of environmental emissions standards, YANMAR is providing sustainable solutions towards a new era of prosperity.